


Part No.

# QTFT-2MB0-RS

*G 1/4" male BSPP (ISO 228/1) x male Quick-test, no check-valve, with cap and chain, brass*

Connect Female BSPP (ISO 228/1) parallel thread to Quick-test hose for permanent installation where frequent calibrations are performed

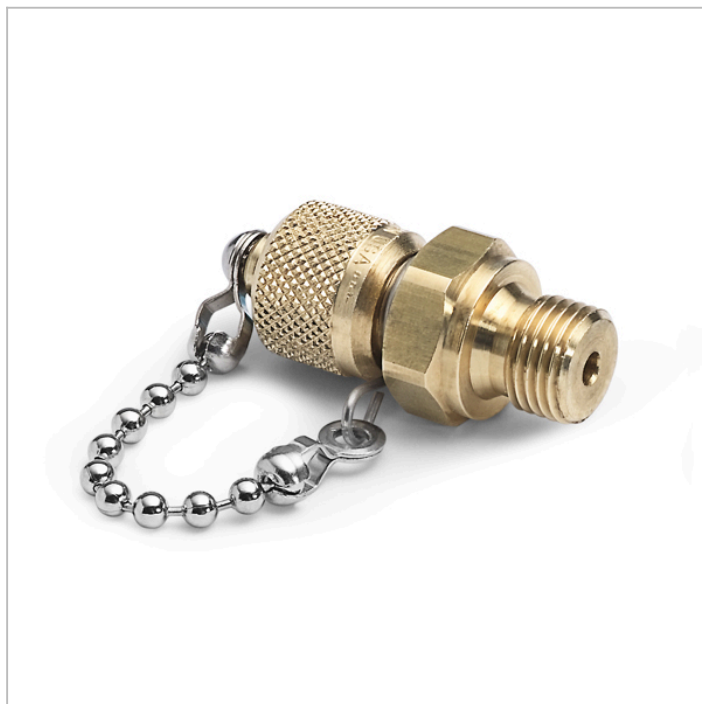

QTFT-2MB0-RS

## Specs/Attributes

Country of origin	USA
Has Check Valve	No
Materials	Brass
Max Operating Temperature	225 °F / 105 °C
Max Pressure	5000 PSI / 350 bar / 35 MPa
Max Vacuum	0.00 InHg / 0.0 kPa
Min Operating Temperature	0 °F / -18 °C
Seal Materials	Buna-N
Wrench Size	3/4 In 19 mm
Connector End 1	Male Quick-test
Connector End 2	G 1/4 Male BSPP (ISO 228)
Weight	2.32 oz / 66 grams
Dimensions	H: 1.82 in (4.62 cm) x W: 0.75 in (1.91 cm) x D: 0.75 in (1.91 cm)