


Part No.

# QTHA-KIT25

*Ralston Quick-test BSPP Gauge on Hose Kit*

Pressure gauge connection kit for mounting on a hose when calibrating pressure gauges with BSPP connections

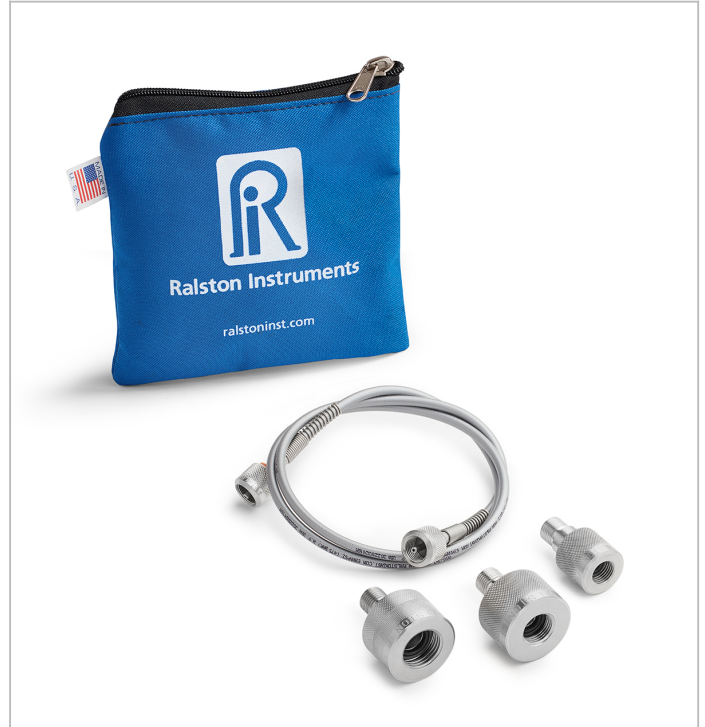

QTHA-KIT25

## Included Items

- 1/4" Female BSPP - 1/4" female BSPP Quick-disconnect x male Quick-test, S.S. (QTHA-2FS0-RG-QD)
- 3/8" Female BSPP - 3/8" female BSPP quick-disconnect x male Quick-test, S.S. (QTHA-3FS0-RG-QD)
- 1/2" Female BSPP - G 1/2 female BSPP quick-disconnect x male Quick-test, S.S. (QTHA-4FS0-RG-QD)
- Hose - Quick-test 6900 psi hose, S.S. hose ends, 1 m (3.3 ft) long (QSQS-HOS-1m)
- Bag - Zippered bag to hold hose and adapters, nylon (SM-0084)

### 1/4" Female BSPP QTHA-2FS0-RG-QD

|                           |  |
|---------------------------|--|
| Country of origin         | USA  |
| Has Check Valve           | No   |
| Materials                 | Stainless Steel                            |
| Max Operating Temperature | 225 °F / 105 °C                            |
| Max Pressure              | 5000 PSI / 350 bar / 35 MPa                |
| Min Operating Temperature | 0 °F / -18 °C                              |
| Seal Materials            | Buna-N, Teflon                             |
| Dimensions                | H: 1.7 in (4.32 cm) x W: 0.95 in (2.41 cm) |

### 3/8" Female BSPP QTHA-3FS0-RG-QD

|                   |                 |
|-------------------|-----------------|
| Country of origin | USA             |
| Has Check Valve   | No              |
| Materials         | Stainless Steel |

### 3/8" Female BSPP QTHA-3FS0-RG-QD

|                           |   |
|---------------------------|---|
| Max Operating Temperature | 225 °F / 105 °C                             |
| Max Pressure              | 5000 PSI / 350 bar / 35 MPa                 |
| Min Operating Temperature | 0 °F / -18 °C                               |
| Seal Materials            | Buna-N, Teflon                              |
| Dimensions                | H: 1.74 in (4.42 cm) x W: 1.37 in (3.48 cm) |

### 1/2" Female BSPP QTHA-4FS0-RG-QD

|                           |   |
|---------------------------|---|
| Country of origin         | USA   |
| Has Check Valve           | No  |
| Materials                 | Stainless Steel                             |
| Max Operating Temperature | 225 °F / 105 °C                             |
| Max Pressure              | 5000 PSI / 350 bar / 35 MPa                 |
| Min Operating Temperature | 0 °F / -18 °C                               |
| Seal Materials            | Buna-N, Teflon                              |
| Dimensions                | H: 1.72 in (4.37 cm) x W: 1.38 in (3.51 cm) |

### Hose QSQS-HOS-1m

|                           |   |
|---------------------------|---|
| Burst Pressure            | 27000 PSI / 1860 bar / 185 MPa                          |
| Color                     | Silver  |
| Country of origin         | USA   |
| Fluid Media               | Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water |
| Hose Length               | 1 m / 3.28 ft   |
| Inner Diameter            | 0.08 In / 3.00 mm                                       |
| Length                    | 1.00 m / 3 ft 3 in                                      |
| Materials                 | Stainless Steel   |
| Max Operating Temperature | 140 °F / 60 °C  |
| Max Pressure              | 6900 PSI / 475 bar / 48 MPa                             |
| Max Vacuum                | -30.00 InHg / -101.6 kPa                                |
| Media Compatibility       | Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water |
| Min Operating Temperature | -40 °F / -40 °C   |
| Minimum Bend Radius       | 1.00 In / 26 mm   |
| Outer Diameter            | 0.20 In / 6.00 mm                                       |
| Type                      | QT  |

### Bag SM-0084

|              |                                 |
|--------------|---------------------------------|
| Max Pressure | 0.00 PSI / 0.00 mbar / 0.00 kPa |
| Max Vacuum   | 0.00 InHg / 0.0 kPa             |

**Bag SM-0084**

|                   |                |
|-------------------|----------------|
| Materials         | Zippered Nylon |
| Country of origin | USA            |