


Part No.

# QTHA-KIT25

*Ralston Quick-test BSPP Gauge on Hose Kit*

Pressure gauge connection kit for mounting on a hose when calibrating pressure gauges with BSPP connections

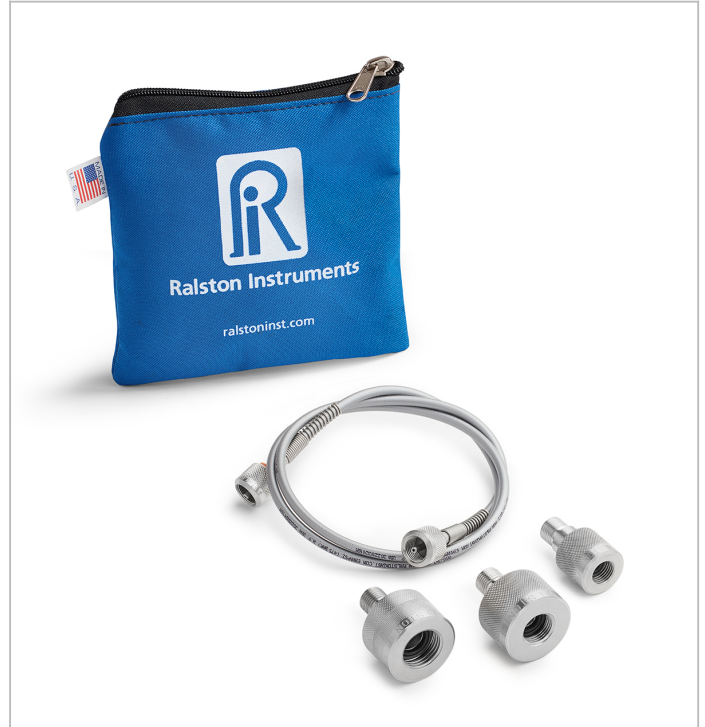

QTHA-KIT25

## Included Items

- 1/4" Female BSPP - 1/4" female BSPP Quick-disconnect x male Quick-test, S.S. (QTHA-2FS0-RG-QD)
- 3/8" Female BSPP - 3/8" female BSPP quick-disconnect x male Quick-test, S.S. (QTHA-3FS0-RG-QD)
- 1/2" Female BSPP - G 1/2 female BSPP quick-disconnect x male Quick-test, S.S. (QTHA-4FS0-RG-QD)
- Hose - Quick-test 6900 psi hose, S.S. hose ends, 1 m (3.3 ft) long (QSQS-HOS-1m)
- Bag - Zippered bag to hold hose and adapters, nylon (SM-0084)

## 1/4" Female BSPP QTHA-2FS0-RG-QD

Country of origin	USA
Has Check Valve	No
Materials	Stainless Steel
Max Operating Temperature	225 °F / 105 °C
Max Pressure	5000 PSI / 350 bar / 35 MPa
Min Operating Temperature	0 °F / -18 °C
Seal Materials	Buna-N, Teflon
Connector End 1	G 1/4 Female BSPP (ISO 228)
Connector End 2	Male Quick-test
Dimensions	H: 1.7 in (4.32 cm) x W: 0.95 in (2.41 cm)

## 3/8" Female BSPP QTHA-3FS0-RG-QD

Country of origin	USA
Has Check Valve	No

### 3/8" Female BSPP QTHA-3FS0-RG-QD

Materials	Stainless Steel
Max Operating Temperature	225 °F / 105 °C
Max Pressure	5000 PSI / 350 bar / 35 MPa
Min Operating Temperature	0 °F / -18 °C
Seal Materials	Buna-N, Teflon
Connector End 1	G 3/8 Female BSPP (ISO 228)
Connector End 2	Male Quick-test
Dimensions	H: 1.74 in (4.42 cm) x W: 1.37 in (3.48 cm)

### 1/2" Female BSPP QTHA-4FS0-RG-QD

Country of origin	USA
Has Check Valve	No
Materials	Stainless Steel
Max Operating Temperature	225 °F / 105 °C
Max Pressure	5000 PSI / 350 bar / 35 MPa
Min Operating Temperature	0 °F / -18 °C
Seal Materials	Buna-N, Teflon
Connector End 1	G 1/2 Female BSPP (ISO 228)
Connector End 2	Male Quick-test
Dimensions	H: 1.72 in (4.37 cm) x W: 1.38 in (3.51 cm)

### Hose QSQS-HOS-1m

Burst Pressure	27000 PSI / 1860 bar / 185 MPa
Color	Silver
Country of origin	USA
Fluid Media	Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water
Hose Length	1 m / 3.28 ft
Inner Diameter	0.08 In / 3.00 mm
Length	1.00 m / 3 ft 3 in
Materials	Stainless Steel
Max Operating Temperature	140 °F / 60 °C
Max Pressure	6900 PSI / 475 bar / 48 MPa
Max Vacuum	-30.00 InHg / -101.6 kPa
Media Compatibility	Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water
Min Operating Temperature	-40 °F / -40 °C
Minimum Bend Radius	1.00 In / 26 mm
Outer Diameter	0.20 In / 6.00 mm

**Hose** QSQS-HOS-1m

Type	QT
------	----

**Bag** SM-0084

Materials	Zippered Nylon
Country of origin	USA
Weight	3 oz / 85 grams
Dimensions	H: 6 in (15.24 cm) x W: 1 in (2.54 cm) x D: 7 in (17.78 cm)